



# 8x4 • SHIFTPILOT



**Power / Torque:** 400ps/2,011Nm 460ps/2,213Nm

- Active Brake Assist 5 NEW
- Electronic Stability Control
- Lane Departure Warning



Wheelbase: 5,870mm (S)



Suspension: Steel

- Adaptive Cruise Control
- Driver Fatigue Monitoring
- Active Side Guard Assist NEW



fuso.co.nz

# SHOGLIN FS MODELS

STEEL SUSP.


STEEL SUSP.

### MODEL

8x4	FS3146S	12 SP.	SHIFTPILOT
8x4	FS3146S HI TOP	12 SP.	SHIFTPILOT

ENGINE	
Engine Version	FUSO OM470 6 Cyl. In-line DOHC
Displacement	11 Litre (10,671cc)
Power (DIN)*	460ps (338kW) @ 1600rpm
Torque (DIN)*	2,213Nm (1633lbft) @ 1100rpm
Air Cleaner	Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Selective Catalytic Reduction (SCR + DPF)
Emission Level	EURO 6 (ADR80/03)
Option (FS3146)	Engine Live Drive PTO Max Continous Output 650Nm (780Nm Peak) Ratio 1:1.3043 Rotation Direction: Opposite Engine

0M470 - T4



#### FUEL

Injection System	X Pulse Common Rail High Pressure Direct Injection
Tank	400L Rectangular Alloy Tank + Locking Cap
AdBlue Exhaust Fluid Capacity	60L Tank + Locking Cap

ELECTRICAL	
Voltage	24V Negative Ground, 100A Alternator
Battery Specification	Heavy Duty 2x12V, 150Ah/20hr
CLUTCH	
Туре	FUSO Single Plate Fully Automated

## TRANSMISSION Version FUSO SHIFTPILOT GENERATION 3 Automated Manual G230-12

	WHEELBASE (mm)	GVM (kg)	GCM (kg)
FS72HS4VFBA	5,870 (S)	30,800	55,000
FS72HS4VFBB	5,870 (S)	30,800	55,000

TRANSMISSION	CONTINUED		EURO 6 ENGINE +
Type / Speeds	12 Speed Auto + Manual Modes Constant Mesh Non Synchromesh Transmission Standard + Power Modes: Calibrated for NZ Conditions Skip Shift Function for Light Loads		TRANSMISSION
Features	Driver Activated Crawler Mode - Eco Roll + Eco	+ Rock-Free Mode	
Ratios	1st: 11.672 2nd: 9.101 3rd: 7.055 4th: 5.501 5th: 4.400 6th: 3.430 7th: 2.652	8th: 2.068 9th: 1.603 10th: 1.250 11th: 1.000 12th: 0.779 RHigh: 9.101 RLow: 11.673	
PTO Opening	Rear		

 FRONT AXLE

 Axle Version
 FUSO F900T "I" Beam

 Max Operating Capacity (kg)
 13,000

 FRONT SUSPENSION

 Type
 Long Taper Leaf with Stabiliser Bar + Double Acting Shock Absorbers

 Size (mm)
 1,500 x 90

 REAR AXLE

Axle	D10 Hypoid Tandem Drive + Inter-Axle Diff Lock
Max Operating Capacity (kg)	21,600
Ratio	4.625:1
Option	4.222:1 + 275/70R22.5

REAR SUSPENS	ION
Details	Mechanical 6 Rod Long Taper Leaf 6 Rod Trunnion
BRAKES	
Туре	Full Air Taper Roller Drum Brakes + Auto Adjust, EBS, ABS, ASR (Traction Control)
Size Front / Rear (mm)	410x150/410x200
Park Brake	Rear Wheels Spring Actuated
Engine Brake	Jake Brake: Three-Stage including Shift Down Function – Max 335kW (460ps)
Air Compressor	Two-Stage + ECU Control for Fuel Saving
Air tanks	Alloy
WHEELS AND TY	/RES
Wheels	12 x Alcoa Alloy 22.5 x 8.25" ISO 10 Stud
Size Front / Rear	295/80R22.5/11R22.5
Option	275/70R22.5 + 4.222 Diff Ratio

## SHOGLIN FS MODELS

### **CHASSIS**

Туре	Super Frame, Single Skin, Reinforced Parallel Channel
Size / Width (mm)	300x90x7.0/840

Refer to the bodybuilders guidelines on the Fuso website (www.fuso.co.nz) before mounting a body or modifying the chassis

### INSTRUMENTS

Gauges	Speedo / Tacho / Air Pressure / Fuel Level / Ad Blue Level
Multi-Information Display accessed from steering wheel buttons	Digital Speedo Advanced Safety Systems Control Water Temperature Fuel Consumption Warning Lamps Service Indicators Hour Meter + Tripmeter Oil Level Check Alarm Clock
Steering wheel controls	Audio / Phone / Cruise Control / Multi-Information Display Menu / Speed Limiter

### STANDARD FEATURES

Cab Cooling and Heating Climate Control Air Conditioning
Accessory Power 24V Accessory Power Outlet x 2
Driving SMART Key Push Button Start + Keyless Central Locking Electric Windows Fluorescent Cabin Lamp Interior Reading Lamps Engine Idle Speed Control

<b>CAB FEATURES</b>	
Туре	All Steel 4 Point Air Suspended + Electric / Hydraulic Tilt Cab FS3146 Hi Top: 350mm Extra Headroom + Large Overhead Glovebox
Colour	Natural White (W31)
Seating Capacity	2 + Large Centre Console
Seat (driver)	Air Suspension, Integrated Seat Belt, Auto Levelling, Armrest, Height, Tilt, Lumbar + Dampening Adjust
Seats (passenger)	Bucket Seat with Integral Headrest
Interior	Fully Trimmed + Heavy Duty Vinyl on Floor Premium Rear Bunk Mattress + Curtains <b>FS3146 Hi Top</b> : Carpet on Floor + 4 Speakers
External	Roof Mounting Points (max. static load 50kg) Front End-Outline Marker Lamps

## SERVICE INTERVALS


**60,000km full service / 15,000km safety inspection** 60,000km full service intervals, depending on application/use. 15,000km safety inspection, with greasing, required for reliability and to maintain warranty cover.

## WARRANTY

#### 5 years / 500,000km

Simply have your vehicle serviced at an authorised FUSO Service Centre, at the recommended servicing intervals, and you are covered by an additional 2 year / 250,000km FUSO warranty on top of the first 3 years / 250,000km. That's a total of 5 years / 500,000km cover! Refer to the terms and conditions in the FUSO warranty booklet for full details.

## SAFETY FEATURES

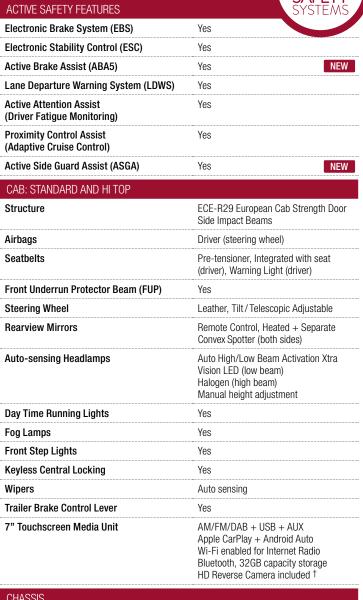

CHASSIS	
Speed Limter	Yes (100km/h factory setting)
Jake Engine Brake (460ps)	Yes
Anti-Lock Braking System (ABS)	Yes
Brake Overide System	Yes
Hill Start System	Yes
Traction Control (ASR)	Yes
Interaxle Diff Lock	Yes
Emergency Stop Signal (ESS)	Yes
Reverse Warning Buzzer	Yes
ΟΡΤΙΟΝΟ	

#### OPTIONS

<sup>†</sup> Additional Touchscreen Display Cameras (up to 4)

**Truck Specific GPS Navigation** 

**Reversing Sensors** 

Tyre Pressure Monitoring System (up to 36 tyres)

		Vehicle I	Ratings**	Max Axle I	_oadings**	k	Kerb Weights	3*
Model		GVM	GCM	Front	Rear	Front	Rear	Total
8x4 FS3146S 12 Sp. SHIFTPILOT Steel Susp.	FS72HS4VFBA	30,800	55,000	13,000	21,600	5,735	3,095	8,830***
8x4 FS3146S HI TOP 12 Sp. SHIFTPILOT Steel Susp.	FS72HS4VFBB	30,800	55,000	13,000	21,600	5,765	3,095	8,860***

## SHOGLIN FS MODELS


## PERFORMANCE

Turning Circle (kerb to kerb - metres)	21.6
Electronically Speed limited to 100km/hr	Can be adjusted lower by dealer
Engine Speed (rpm) 90km/hr (top gear)	1,700
Gradeability at Rated GCM (theoretical)*	29%

\*This is theoretical performance only. Actual performance may vary under different conditions

## DIMENSIONS (mm)

Wheelbase		5,870
Length Overall		10,140
Height Overall	FS3146:	3,260
	FS3146 HiTop:	3,610
Width Overall		2,490
Width Rear Axle		2,475
Width Front track		2,075
Width Rear Track		1,865
Width Frame		840
Height Frame at Rear Axle	(11R22.5) (275/70R22.5)	1,060 1,020

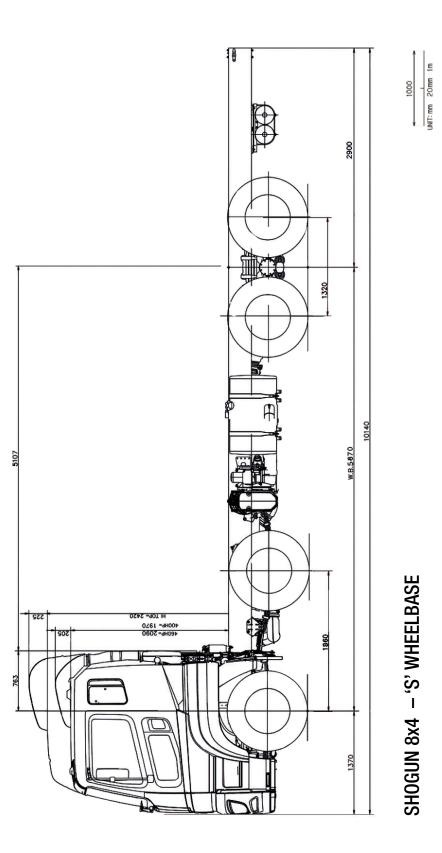

Scale = 1:50 (20mm = 1 metre). This scale is accurate when used on the original spec sheet, be aware that enlarging these illustrations can alter the scale and cause incorrect measurements. Fuso New Zealand and its authorised dealers always recommend customers seek professional advice from independent sources before commencing any engineering activities.

A policy of continual improvement means that specifications detailed in this brochure are subject to change without notice. Contact your authorised Fuso dealer to confirm current specifications. Fuso is a registered trademark of Mitsubishi Fuso Truck & Bus Corporation. Copyright @ Fuso NZ (2022)

