


# ENDURO FJ2528



<b>Model code</b>	FJX3WK2RFBA
<b>Configuration</b>	6x4
<b>GVM</b>	25,000kg
<b>GCM</b>	36,000kg
<b>Axle GVM ratings</b>	Front: 6,600kg Rear: 19,000kg
<b>Kerb weight (10L fuel)</b>	Front: 4,050kg Rear: 3,860kg Total: 7,910kg
<b>Engine</b>	OM906, 6.4L, 6 Cylinder
<b>Power/torque</b>	285hp (210kW) @ 2200rpm / 1120Nm @ 1200-1600rpm
<b>Live Drive PTO</b>	Output Torque: 600Nm Ratio: 1:07 x engine speed

<b>Transmission</b>	9 spd G131 Manual Synchromesh Ratios: 14.57 - 9.48 - 6.64 - 4.82 - 3.67 - 2.59 - 1.81 - 1.32 - 1.00 : R - 13.86
<b>PTO (Std)</b>	Output Torque: 700Nm Ratio: 1.357 @ 1700rpm
<b>Axles</b>	Front: Reverse Elliot (6,600kg) Rear: Full Floating with Diff Lock and Cross Locks (11,000kg x 2); Ratio : 4.778 : 1
<b>Suspension</b>	Front: Parabolic with Anti Roll Bar Rear: Multi Leaf, Tandem Bogie with Torque Rods and Anti Roll Bar
<b>Brakes</b>	Full Air S Cam with Auto Brake Adjustment and ABS Auxiliary: Exhaust Brake and Engine Brake
<b>Tyres</b>	295/80R22.5
<b>Wheels</b>	8.25" x 22.5" 10 Stud ISO
<b>Fuel</b>	290L + 60L Ad Blue
<b>Electrical</b>	24Volt / 80Amp Alt
<b>Performance</b>	90km/hr speed limited; Max gradability = 70%


## OM906

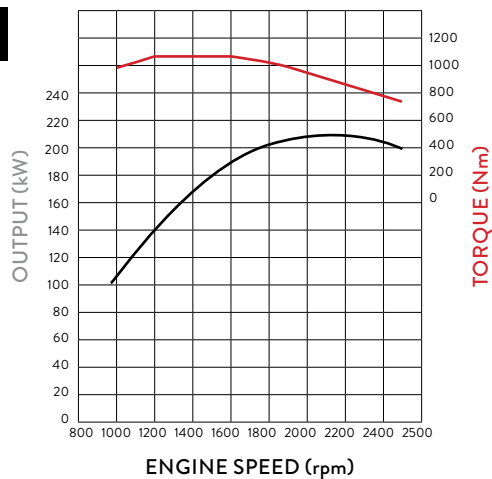

### 3 Seat Cab

Meets ECE R29 crash standard (max 6,000kg front axle loading)  
 All Steel Forward Control Tilting Day Cab  
 Arctic White (AW1)  
 Air Suspended Driver's Seat with Integral Seat Belt  
 ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder  
 Air Conditioner / Heater / Demister  
 12V Accessory Power Outlet  
 Radio AM/FM + USB + AUX  
 Central Locking / Electric Windows  
 Dual Door Mirrors + LH Front and Side Safety Mirrors  
 Speedo, Tacho, Air and Fuel Gauges  
 Ad Blue Level, Engine Hours, Fuel Consumption, Water Temperature  
 Variable RPM Control

# ENDURO FJ2528

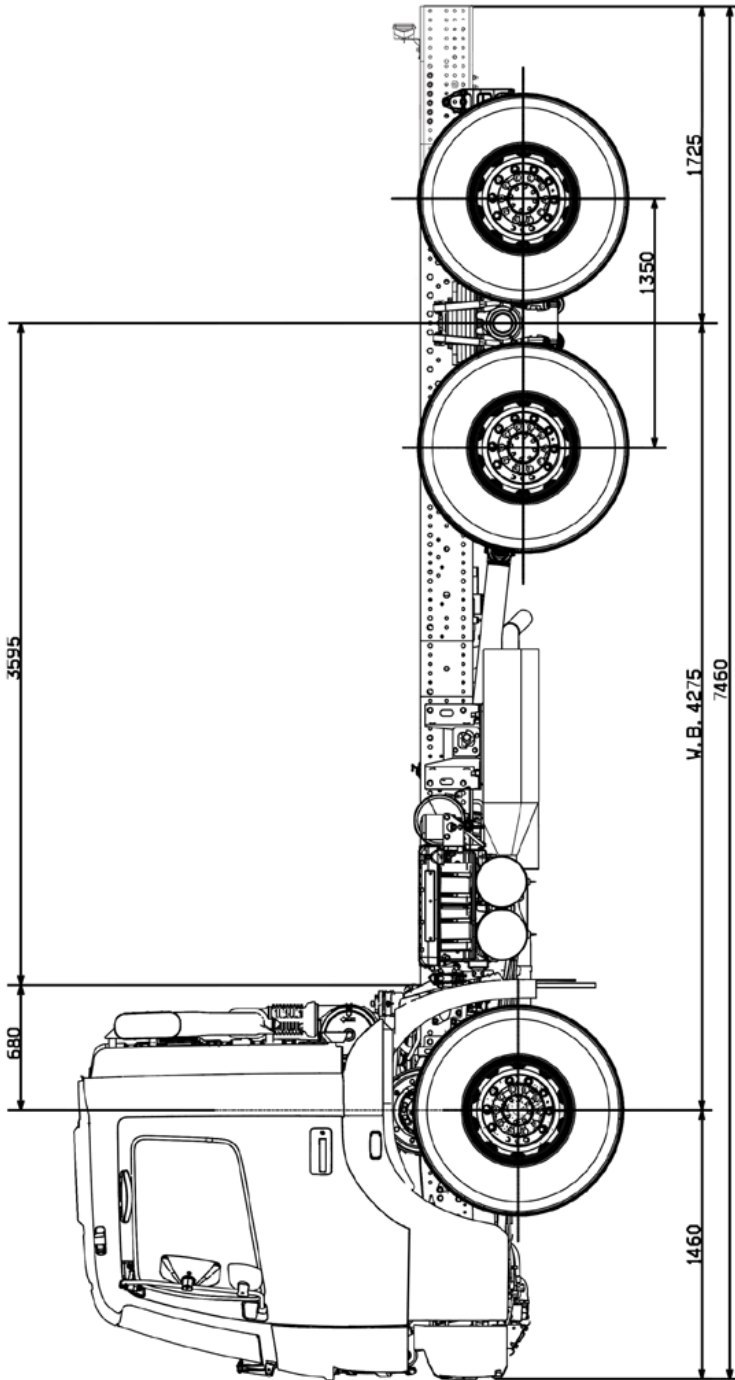

## DIMENSIONS

Wheelbase	4,275
Overall Length	7,460
Width	2,490
Height	2,930
Frame Height At Rear Axle	1,110
Rear Over Hang (ROH)	1,725
Front Track	2,045
Rear Track	1,805

Note: All dimensions are in mm