


# ENDURO FO3128



<b>Model code</b>	FOX2WN2RFBA	<b>Transmission</b>	9spd G131 manual synchromesh Ratios: 14.57 - 9.48 - 6.64 - 4.82 - 3.67 - 2.59 - 1.81 - 1.32 - 1.00 : R - 13.86																														
<b>Configuration</b>	8x4	<b>PTO (Std)</b>	Output Torque: 700Nm Ratio: 1.357 @ 1700rpm																														
<b>GVM</b>	31,000kg	<b>Axles</b>	Front: Reverse Elliot (6,600kg x2) Ratio : 4.300 : 1 Rear: Full Floating with Diff Lock & Cross Locks (11,000kg x2) Ratio : 4.778 : 1																														
<b>GCM</b>	36,000kg	<b>Suspension</b>	Front: Load Sharing Parabolic with Anti Roll Bar Rear: Multi leaf, Tandem Bogie with Torque Rods & Anti Roll Bar																														
<b>Axle GVM ratings</b>	Front: 6,600kg x2 Rear: 11,000kg x2	<b>Brakes</b>	Full Air S Cam with Auto Brake Adjustment & ABS Auxiliary: Exhaust Brake and Engine Brake																														
<b>Kerb weight (10L fuel)</b>	Front: 5,180kg Rear: 3,870kg Total: 9,050kg	<b>Tyres</b>	295/80R22.5																														
<b>Engine</b>	OM906, 6.4L, 6 cylinder	<b>Wheels</b>	8.25 x 22.5 10 Stud ISO																														
<b>Power/torque</b>	285hp (210kW) @2200rpm / 1120Nm@ 1200-1600rpm	<b>Fuel</b>	260L + 60L Ad Blue																														
<b>Live Drive PTO</b>	Output Torque: 600Nm Ratio 1:07 x engine speed	<b>Electrical</b>	24Volt / 80Amp Alt																														
		<b>Performance</b>	90km/hr speed limited; Max gradability = 51%																														
<b>OM906</b>	<table border="1"> <caption>OM906 Performance Data</caption> <thead> <tr> <th>Engine Speed (rpm)</th> <th>Output (kW)</th> <th>Torque (Nm)</th> </tr> </thead> <tbody> <tr> <td>1000</td> <td>100</td> <td>800</td> </tr> <tr> <td>1200</td> <td>160</td> <td>1100</td> </tr> <tr> <td>1400</td> <td>190</td> <td>1100</td> </tr> <tr> <td>1600</td> <td>200</td> <td>1100</td> </tr> <tr> <td>1800</td> <td>205</td> <td>1050</td> </tr> <tr> <td>2000</td> <td>200</td> <td>1000</td> </tr> <tr> <td>2200</td> <td>210</td> <td>950</td> </tr> <tr> <td>2400</td> <td>200</td> <td>900</td> </tr> <tr> <td>2500</td> <td>200</td> <td>850</td> </tr> </tbody> </table>			Engine Speed (rpm)	Output (kW)	Torque (Nm)	1000	100	800	1200	160	1100	1400	190	1100	1600	200	1100	1800	205	1050	2000	200	1000	2200	210	950	2400	200	900	2500	200	850
Engine Speed (rpm)	Output (kW)	Torque (Nm)																															
1000	100	800																															
1200	160	1100																															
1400	190	1100																															
1600	200	1100																															
1800	205	1050																															
2000	200	1000																															
2200	210	950																															
2400	200	900																															
2500	200	850																															
		<b>3 Seat Cab</b>	All Steel Forward Control Tilting Day Cab Arctic White (AW1) Air Suspended Driver's Seat with Integral Seat Belt ELR 3 Point with Centre Lap Belt & Driver's Seat Belt Reminder Air Conditioner / Heater / Demister 12V Accessory Power Outlet Radio AM/FM + USB + AUX Central Locking / Electric Windows Dual door mirrors + LH Front and Side Safety Mirrors Speedo, Tacho, Air & Fuel Gauges Ad Blue level, Engine Hours, Fuel Consumption, Water Temperature Variable RPM Control Cruise Control																														

# ENDURO FO3128

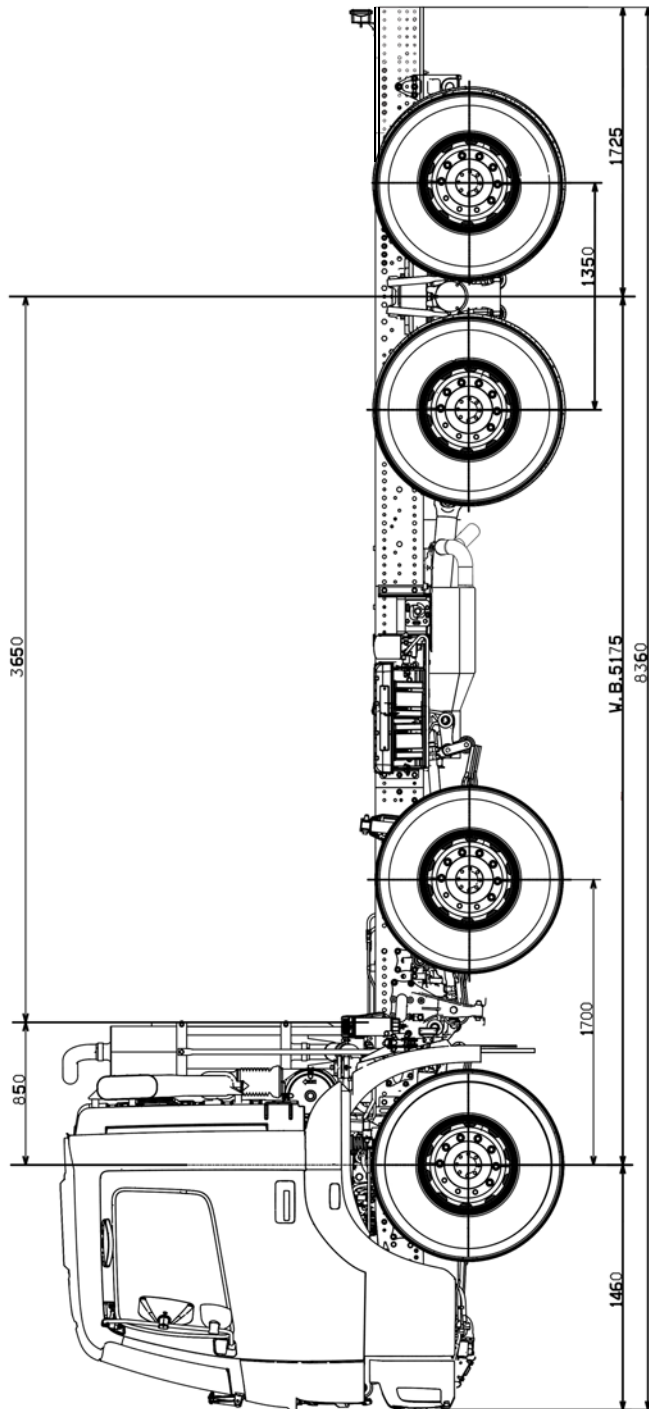

## DIMENSIONS

Wheelbase 5,175

Overall Length 8,360

Width 2,490

Height 2,945

Frame Height  
At Rear Axle 1,130

Rear Over Hang (ROH) 1,725

Front Track 2,045

Rear Track 1,805

Note: All dimensions are in mm